


# Meraki 4/7 dBi Dual-Band Omni Antenna Set (MA-ANT-20)

The Meraki MA-ANT-20 antenna is a multi-band, omni-directional antenna designed for use with Meraki APs that have N-type connectors. It is a versatile antenna and is suitable for a broad range of applications. The MA-ANT-20 is sold in sets of 2.



## Signal Coverage Patterns

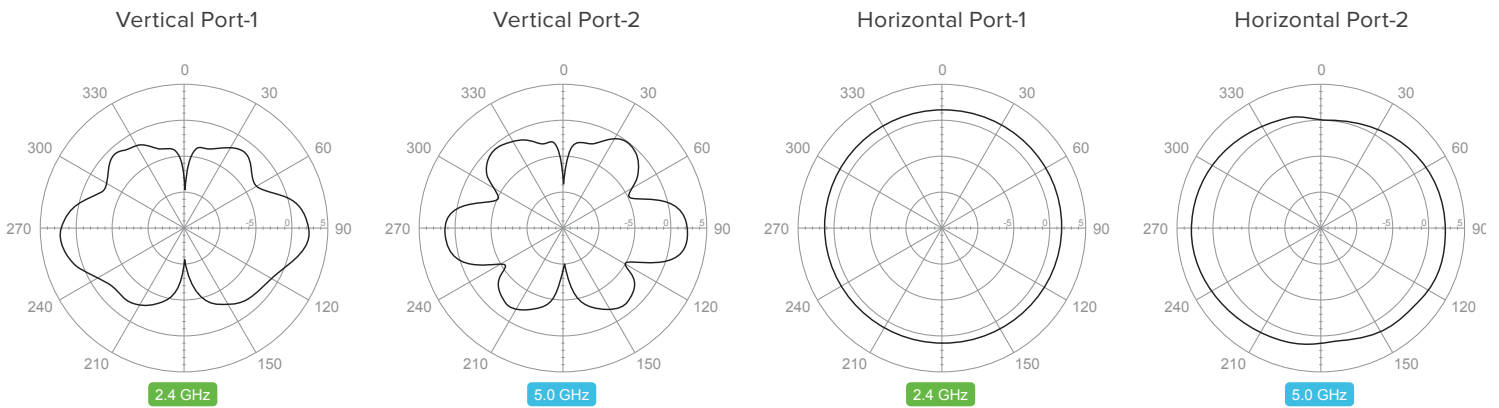

## Specifications

### Electrical

Antenna type: omni-directional

Frequency range (2 GHz): 2.400 – 2.500 GHz

Frequency range (5 GHz): 5.150 – 5.875 GHz

Gain (2 GHz): 4 dBi

Gain (5 GHz): 7 dBi

Polarization: vertical (linear)

Half power beamwidth / horizontal: 360°

Half power beamwidth / vertical: 45°

### Box Contents

Two Meraki MA-ANT-20 antennas

### Mounting

Directly to unit (no cable required)

### Physical and Environmental

Dimensions: 1.0 x 7.1" (25 mm x 180 mm)

Weight: 0.17 lbs (79 g)

Material: ABS plastic

Temperature: -40° F – 158° F (-40° C – 70° C)

Connector: N-type

### Warranty

1 year hardware warranty included

### Regulatory

Certified for use with the MR58, MR62, MR66, MR72